ZELLINGER
ITALIAN BALL VALVES

CHECK

CHECK

MG100

Design Features

Construction	2 pieces
Installation configuration	Above ground
Dimensions / Size	From ¼" to 2"
Class / Pressure range	S.800, S.1500, S.3000 e S.6000 / #800 o #1500
Ends	Threaded / socket weld

Material of Construction

Body, ball, stem and seat	Forged low temperature carbon steel or stainless steel
Sealing	O-ring and ptfe
Gasket	O-ring

Design Standard

End to end	According to manufacturer standard
End connection	ASME B1.20.1, ISO 228-1 or ASME B16.11
Pressure test	API 6D, EN 12266-1 or API 598
Sealing class	ISO 5208 Rate A
Pressure Equipment Directive	2014-68-UE
Atmosphères Explosibles	2014-34-UE

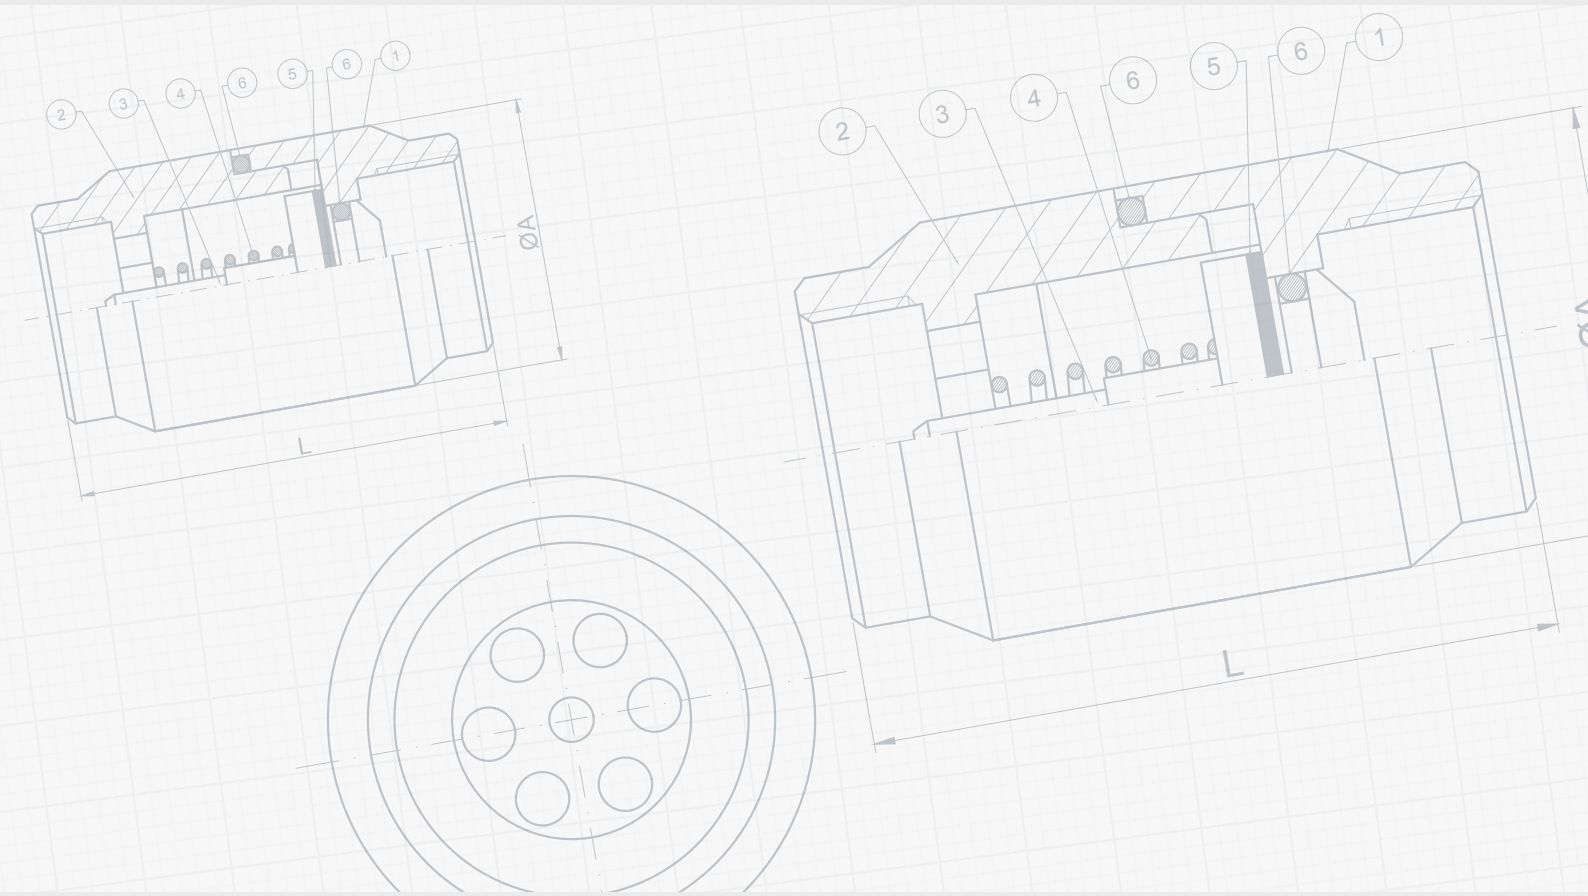

Zellinger SRL
Tel: +39 0331274109 | E-mail: info@zellinger.it | www.zellinger.it
C.F. / P.IVA: 03196260123 | Share Capital: €1.000.000 fully paid-up

ZELLINGER
ITALIAN BALL VALVES

MG100

ITEM	DESCRIPTION
1	CLOSURE
2	BODY
3	BODY SEAL
4	STEM
5	STEM SEAK
6	SPRING
7	GASKET

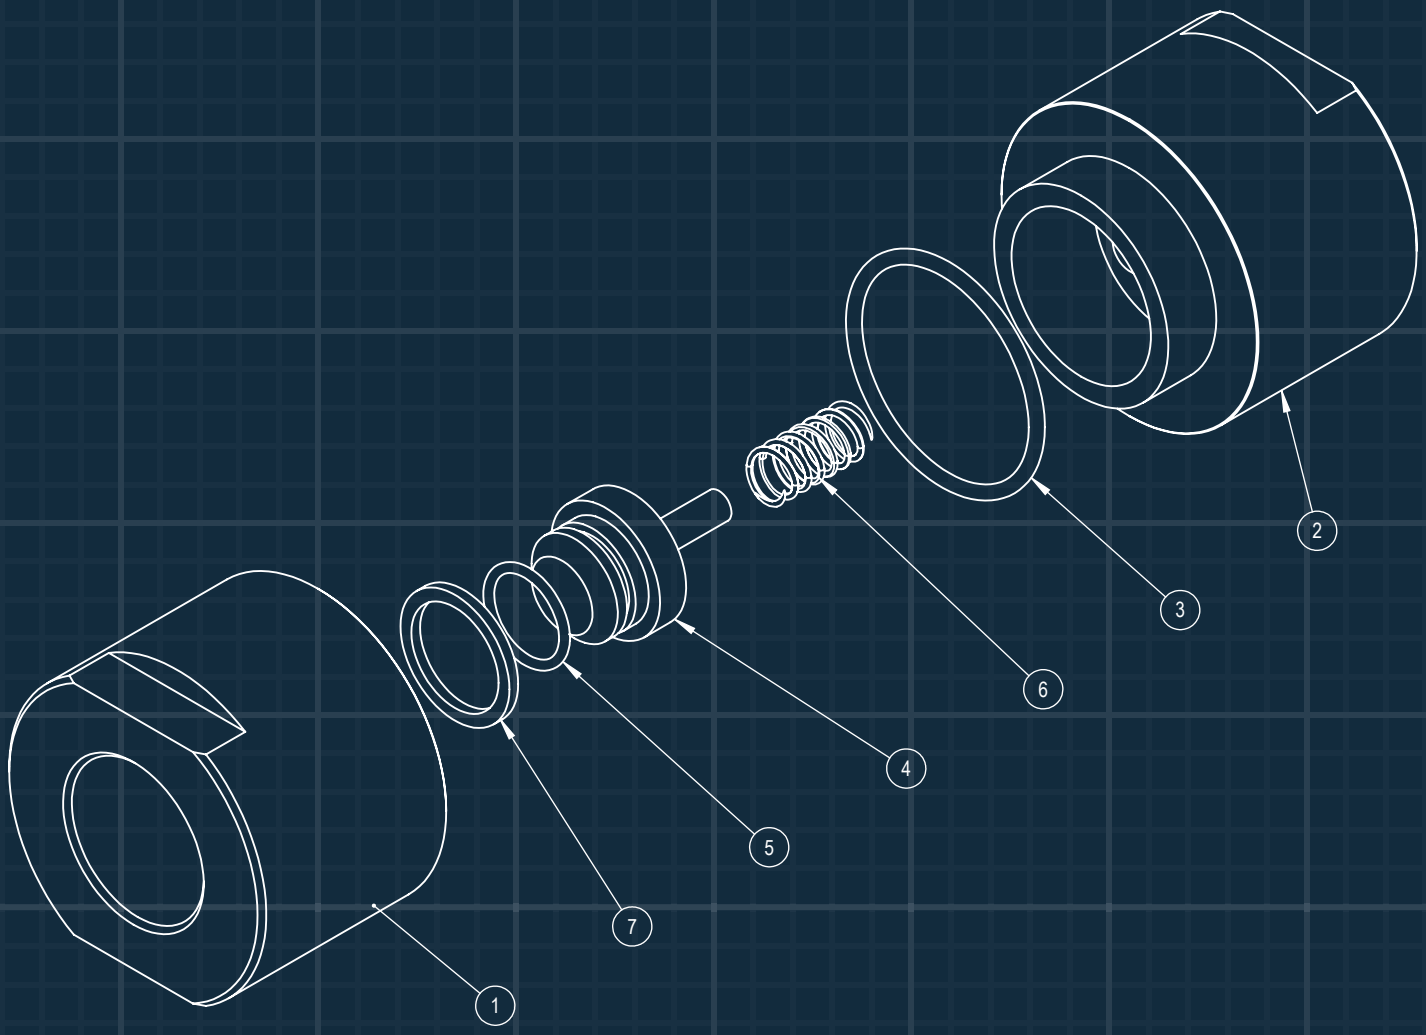

Zellinger SRL
Tel: +39 0331274109 | E-mail: info@zellinger.it | www.zellinger.it
C.F. / P.IVA: 03196260123 | Share Capital: €1.000.000 fully paid-up

ZELLINGER
ITALIAN BALL VALVES

ZELLINGER
ITALIAN BALL VALVES

Valves Excellence For A Lifetime.

+39 0331274109
info@zellinger.it

Headquarters
Via per Gallarate 50/A 21010
Besnate (VA) Italy

Offices and warehouse
Via 2 Giugno, 72 21011
Casorate Sempione (VA) Italy

Manufacturing facility
Via per Cedrate, 942 21044
Cavaria con Premezzo (VA) Italy

Warehouse
Via al Boscaccio 5, 21011
Casorate Sempione (VA) Italy